

Diesel Powered Generating Sets Power By Cummins Engine



DIY-C215,50HZ,230/400V,3P/4W

Standard Genset Features Generator Performance Generator Set Options

Single Source Responsibility

Design, manufacture and testing of engine, alternator, control system and complete generating set are all produced by the companies with DIY Group.

- Single bearing alternator, class H/H
- Standard voltage 230/400 volts 50 Hz
- Exciter/Voltage reg - Torque Match as standard
- Standard ComAp AMF20 Auto start with AMF
- Steel base frame with A/V mounting, Engine, Alternator, Chassis & Control Box
- 3 pole Delixi Circuit Breaker
- 50 Degree Radiator
- Packing under shrunk plastic film
- Operation & Maintenance manual
- Standard set of labels
- Battery Charger 24V, 5A or 10A
- Floating Battery Charger 24V, 5A or 10A
- Seaworthy Plastic film packaging
- Maintenance-free battery

Voltage Regulation

Maintains voltage output to within $\pm 1.0\%$.
At any power factor between 0.8 and 1.0
At any variations from No load to Full load.
At any variations from Cold to Hot.
At speed droop variations up to 4.5%.

Frequency Regulation

Isochronous under varying loads from no load to 100% full load when electronic governor is fitted

Random Frequency Variation

Will not exceed $\pm 0.25\%$ of its mean value for constant loads – no load to full load.

Waveform

Total harmonic distortion open circuit voltage waveform in the order of 1.8%. Three-phase balanced load in the order of 5.0%.

Telephone Influence Factor (TIF)

TIF better than 50.
THF to BS 4999 Part 40 better than 2%.

Alternator Temperature Rise

Class H insulation.

Radio Interference

In compliance with BS 800 and VDE levels G and N.

Fuel options

Fuel Tank under 8working hours capacity

Exhaust Options

- Exhaust Silencer - Industrial In-Line
- Exhaust Bellows
- Exhaust Silencer - Residential , In-Line
- Installation Kit - Industrial Silencer
- Installation Kit - Residential Silencer

Voltage Connections

240/416V, 230/400V, 220/380V,

Miscellaneous Options

- 3 pole or 4 pole Circuit Breaker
- Optional Set mounted starting batteries
- Coolant Heater 240V
- Battery Charger 240V, 5A or 10A
- Automatic Transfer Switches
- Packing - Export Box

Engine Specification Alternator Specification Quality Standards

Type

Cummins water cooled Diesel engine, four cycle, turbocharged and low temperature aftercooled

Construction

Two valves per cylinder, forged steel crankshaft and connecting rods, cast iron block.

Starting

12/24 volt negative earth. Battery charging alternator 35 amp on engine. Cranking current 1800 amps at 0°C.

Fuel System

12/24 volt fail safe actuator. Spin-on paper element fuel filters with fuel pump injection system with integral electronic governor. Dual flexible fuel lines and connectors. Standard fuel water separator.

Filters

Air cleaner with dry element.
Spin-on full flow lube oil filter.

Cooling

40°C ambient temperature standard
Stone guard. Drain Tap

Type

Brushless single bearing, revolving field, pole, drip proof, screen protected.
Class H Insulation, IP23 Protection
Fully interconnected damper winding.
AC exciter and rotating rectifier unit.
Epoxy coated stator winding.
Rotor and exciter impregnated with tropical grade insulating oil and acid resisting polyester resin. Dynamically balanced rotor BS 5625 grade 2.5.
Sealed for life bearings.
Layer wound mechanically wedged rotor.

Exciter

Triple dipped in moisture, oil and acid resisting polyester varnish and coated with anti-tracking varnish.

Output windings with 2/3 pitch for improved harmonics and paralleling ability.
Close coupled engine/alternator for perfect alignment.

To BS4999/5000 pt 99,
VDE 0530, UTE5100,
NEMA MG1-22, CEMA,
IEC 34, CSA A22.2,
AS1359, BS 5514,
ISO 3046 and ISO 8528
ISO9001:2000,ISO14000,
CE Compliance



Engine Performance Data@1500RPM			
Output Power		Fuel Consumption	
%	kW	g/kW.h	L/h
Standby Power			
100	203	209	51
Prime Power			
100	183	205	45
75	137	206	34
50	92	211	23
25	46	241	13

Specification

Model	DIY-C215	Alternator Manufacture	LeroySomer
Standby Power	215kVA/172kW	Alternator Model	LSA46.2M5
Prime Power	200kVA/160kW	Standby Power	214kVA/171kW
Engine Manufacture	DCEC CUMMINS	Prime Power	200kVA/160kW
Engine Model	Cummins 6CTAA8.3-G2	Alternator Voltage Regulation	AVR SX460
Number of Cylinders	6L	Alternator Insulation	H
Air intake way	Turbocharged and Charge Air Cooled	Protection Class	IP23
Borexstroke	114mm X 135mm	Fuel Consumption at 100% Output (Standby)	51L/h
Compression Ratio	18.0:1	Fuel Consumption at 100% Output (Prime)	45L/h
Displacement	8.3L	Intake Air Flow	191L/S
Engine Standby Output	203KW(50HZ)	Exhaust Gas Temperature(Standby)	580°C
Engine Prime Output	183kW	Radiated Heat to Ambient(Standby)	26
Speed	1500 rpm	Fuel Tank Capacity	408LT/108 US Gallon
Lubrication Capacity	23.8 liter	Coolant Capacity	12.3 liter

In accordance with ISO 8528, 3046, BS5514
PRIME POWER


Prime Power is available continuously during the period of power outage in a variable load application. Variable load should not exceed a 70% average of the prime power rating during any 24 hour period.

A 10% overload capability is available for a period of 1 hour within a 12 hour period of operation.

STANDBY POWER

The Standby Power is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

Canopy diagram

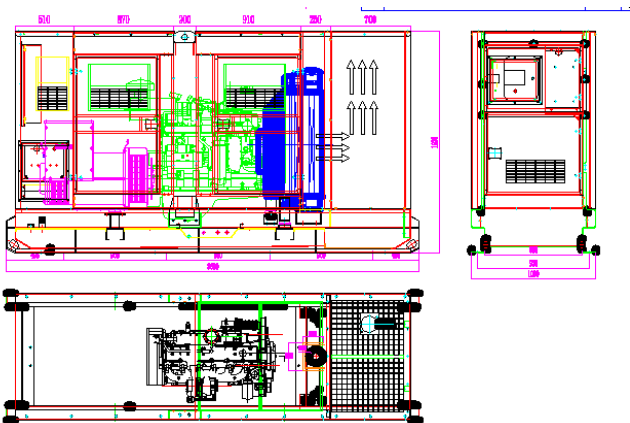

1500 rmp400v 3P 4W/60HZ/0.8F			Open type Dimensions & Weight				Canopy type Dimensions & Weight			
Genset Model	Cummins	Original Stamford	Length mm	Width mm	Height mm	Weight(dry) kg	Length mm	Width mm	Height mm	Weight(dry) kg
DIY-C175R5	6CTA8.3G2	UCI274F	2220	980	1550	1930	3300	1090	1780	2020
DIY-C200R5	6CTA8.3G2	UCI274G	2450	980	1710	2080	3600	1090	1920	2080
DIY-C220R5	6CTAA8.3G2	UCI274H	2450	980	1710	2520	3600	1090	1920	2520

Robust Corrosion Resistant Construction

- Δ Black finish stainless stell lock and hinges
- Δ body made from steel components treated with polyester powder coating

Excellent Access for Maintenance

- Δ radiator fill access plate
- Δ lube oil and cooling water drains pipes to exterior of the enclosure
- Δ adding cooling water from top of canopy
- Δ LED light will be lighting automatically when open the door

Security and Safety

- Δ control panel viewing window in a lockable access door
- Δ emergency stop push button (red)mounted on enclosure interior
- Δ cooling fan and battery charging alternator fully guarded
- Δ exhaust silencing system totally enclosed for operator safety
- Δ Control panel and cable design in different directions,all the connection wiring in control panel are more neater and firmer.

Note:

Rating Definitions (Operation at Altitude ≤1000m, Ambient temperature ≤ 40°C)Continuous Power.These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power.

Control Panel -ComAp

The base mounted control panel in a vibration isolated sheet steel enclosure. The control panel is equipped as follows:

- a) Instruments: V, A (3 phase), Hz, kW, kVA, kWh.
- b) Controls: Push buttons and LEDs for simple control.
- c) Control module: Standard collocation is ComAp AMF20 Auto start with AMF.

Main Features:

- Δ Support of engines equipped with Electronic Control Unit J1939 interface (25) 1
- Δ Remote Start operation available
- Δ Active SMS / E-mails
- Δ Comprehensive diagnostic messages; SPN / FMI codes; KWP2000 support
- Δ Automatic or manual start / stop of the gen-set
- Δ Graphic back-lit LCD display
- Δ Parameters adjustable via keyboard or PC
- Δ Selectable protections alarm / shutdown
- Δ Configurable analog inputs and outputs
- Δ Battery voltage, engine speed (pickup) measurement
- Δ Configurable programmable binary inputs and outputs
- Δ Event based history file
- Δ Warm-up and cooling functions
- Δ Generator C.B. and Mains C.B. control with feedback and return timer
- Δ Power and temperature switching binary output
- Δ Wide range of communication interfaces



DIY reserves the right to modify the characteristics of its product at any time in order to incorporate the latest technological developments. The information contained in this document may therefore be changed without notice. For more technical data

See your distributor for more information.

